


Tennis Score Board

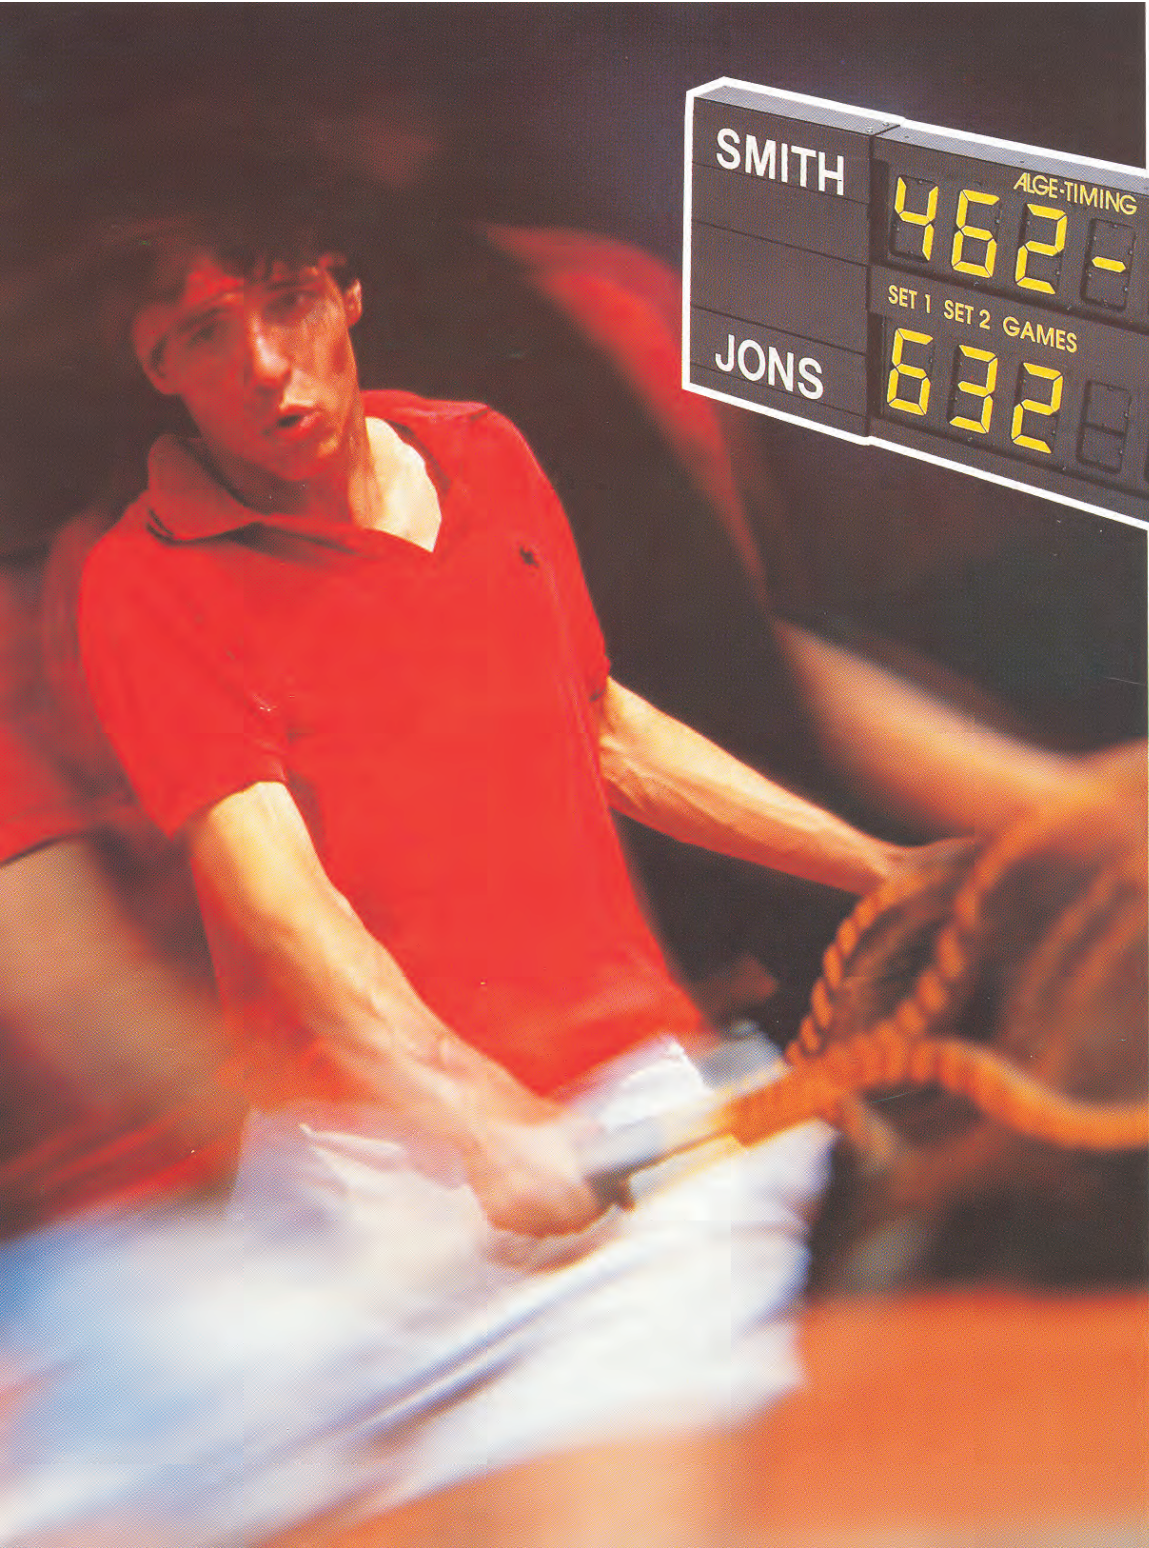

ALGE
TIMING

Tennis Score Board:


The Tennis Score Board consists of two ALGE-GAZ4 display boards mounted in together with a name plate case with slots to insert a plate (player names e. g. with magnetic letters). This rugged unit can be fastened to a base. The score board is controlled by the terminal Timy and can be operated from any distance using two conductor telephone wires. The score board features all the latest electronic advances and is weather resistant. The score board can be powered by ist internal batteries or plugged to AC power continuously.

Features include:

- Simple operation
- Excellent visibility even in sunlight or under flood lights
- The last 20 scores are stored in the memory of the terminal, so that a correction can easily be made.
- Tie breaks and open ended sets can be displayed
- Player names can be applied to the removable panels with magnetic letters or you can insert your own style of signs
- Two digit heights are available, 15 or 25 cm (6 or 9 inch)
- Dual power capability with battery or AC
- All digits and electronics are accessible by sliding the front Plexiglas panel open



Terminal Timy

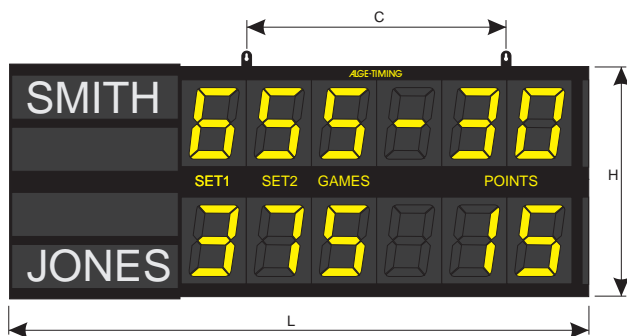


Technical Data:


- Score board and terminal are controlled by CMOS microprocessors.
- The digits are bi-stable, 7-segment, electromagnetic modules, with highly visible yellow vanes. They are rated for over 60 million operations and have low power requirement.
- The case is plastic coated aluminium with hanging brackets on the back. The plexiglas front panel can be removed for easy repair and cleaning.
- High temperature range from -25 to 50°C (-20 to 120°F).
- Built-in rechargeable NiCd battery with charger for either 240 VAC or 120 VAC power.
- The terminal is powered by battery and/or direct from score board.

Score Board Configuration:

Model Uni TA515 or TA525

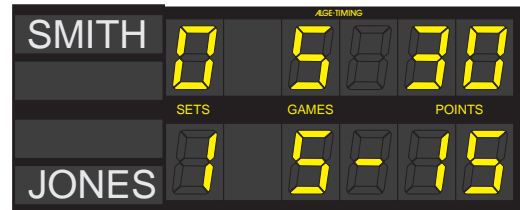

Model 3 Set TA615 or TA625

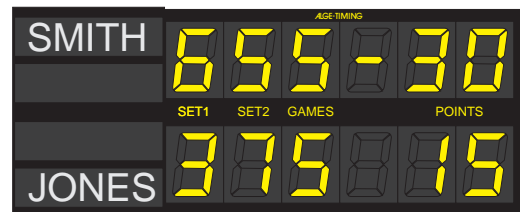

Model 5 Set TA815 or TA825

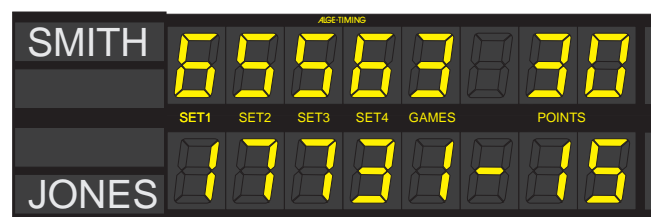


	Figure Height 15 cm (5.9")			Figure Height 25 cm (9.84")		
	Uni TA515	3 Set TA615	5 Set TA815	Uni TA525	3 Set TA625	5 Set TA825
L	1530	1530	1960	2265	2265	2960
H	590	590	590	796	796	796
c	556	556	990	1093	1093	1793
depth	100	100	100	100	100	100

all measurements in millimeter



ALGE-TIMING GmbH
 Rotkreuzstrasse 39
 A-6890 Lustenau
 Austria
 Tel: +43-5577-85966
 Fax: +43-5577-85966-4
 office@alge-timing.com
 www.alge-timing.com